

MANIFOLDS


For Industrial Applications

SRR | MANIFOLD FOR DISTRIBUTION OF INDUSTRIAL, NON CORROSIVE GASES

These manifolds are designed to connect one or more bottles of gas to a singleline. Each inlet connection is equipped with:

- Manual shut-off valve check-valve
- Check-valve, to prevent any return of gas
- Bleeding valve, to clean the circuit before operating

Each manifold provides two outlet connections, one on each side, for the full flexibility of the installation.

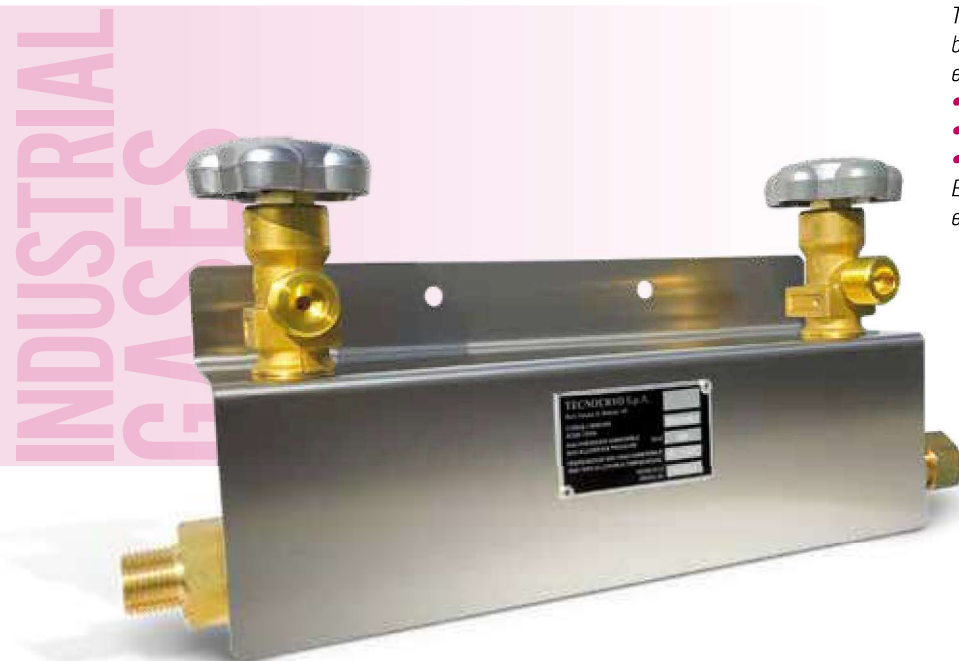

MATERIALS


Body	Made of chrome-plated brass or polished Brass
	Cleaned and degreased for oxygen service
Panel	Anodised aluminium for wall mounting
Knobs	Plastic

TECHNICAL DATA

	Inert gases and oxygen	Flammable gases
Working pressure	Max. 300 bar	
Inlet/outlet connections	Threaded W21.7 x 1/14" male, right-hand	Threaded W20 x 1/14" male, left-hand
Supplementary outlet connections	Plugged by female cup	

MANIFOLDS

For Industrial Applications

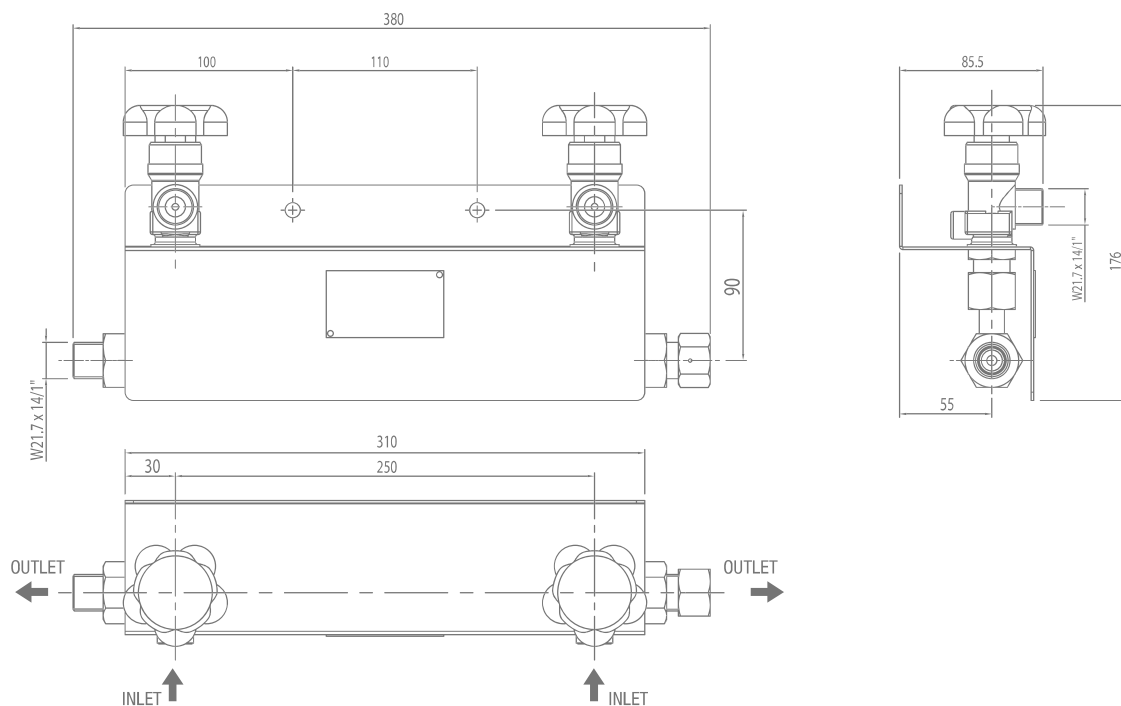

SPECIFICATION	H2-flamable gases	O2-inert gases
Inlet port / Outlet port	W20 x 1/14"	W21,7 x 1/14"
Weight	2,1 kg for single bottle	4,2 kg for two bottles
Temperature range	-20°C to + 110°C	

BRASSMANIFOLD FOR INDUSTRIAL APPLICATIONS

NR. OF BOTTLES	GAS	CODE	
		Brass	Chrome plated brass
1 bottle	Inert gases and oxygen	SRR01001	SRC01001
2 bottles		SRR01002	SRC01002
3 bottles		SRR01003	SRC01003
4 bottles		SRR01004	SRC01004
5 bottles		SRR01005	SRC01005
1 bottle	Flamable gases	SRR07001	
2 bottles		SRR07002	
3 bottles		SRR07003	
4 bottles		SRR07004	
5 bottles		SRR07005	

SPECIAL MANIFOLD FOR GAS ACETYLENE

NR. OF BOTTLES	CONNECTIONS	CODE
1 bottle	7F-UNI 11444 fem. 5/8"	SRB06001
2 bottles	left-hand	SRB06002
3 bottles		SRB06003
4 bottles		SRB06004
5 bottles		SRB06005

SPECIAL MANIFOLD MADE OF STAINLESS STEEL, FOR GAS AMMONIA

NR. OF BOTTLES	CONNECTIONS	CODE
1 bottle	3-UNI 11444 male	SRX04001
2 bottles	W30mm left-hand	SRX04002
3 bottles		SRX04003
4 bottles		SRX04004
5 bottles		SRX04005